

GT Series

Pequeños / Medianos / Grandes eventos Lugares de culto Teatros Estadios Auditorios
Small / Medium / Big events Houses of worship Theaters Stadiums Auditoriums



GT 118 B

*Ultra compacto subwoofer de gran rendimiento
/ High performance compacted subwoofer*





GT 118 B

Ultra compacto subwoofer de gran rendimiento / High performance compacted subwoofer.

Una nueva generación.

La Serie GT es la última generación de la línea profesional de la familia Pro DG Systems. GT 118 B es el perfecto sistema para utilizarse como refuerzo de graves, en pequeños, medianos y grandes eventos. Tanto para touring, como para instalación permanente. GT 118 B es lo suficientemente compacto y potente para el concierto en directo al aire libre, estadios, auditorios y discotecas, así como todo tipo de instalaciones tanto "indoor" como "outdoor" además de ser un actor bastante destacado en producciones teatrales y todo tipo de eventos corporativos.

A new generation.


The GT Series is the last generation from the professional brand Pro DG Systems. GT 118 B is the perfect system to be used as low or deep reinforce, in small, medium and large events. It can be used for touring or for permanent set up. GT 118 B is compacted and powerful enough for outdoor concerts, stadiums, auditoriums and night clubs, as well as indoor or outdoor setups. Finally it has been extensively used in theater productions and corporate events.

DETALLES & BENEFICIOS DETAILS & BENEFITS

- *Pequeño tamaño, gran rendimiento / Small size, high performance.*
- *Excelente refuerzo de graves gracias a su alto SPL / Excellent as a reinforce for deep and low tunes thanks to its high SPL.*
- *Fácil integración con todos los sistemas de la Serie GT de Pro DG Systems / Flexible integration with all systems from GT Series*

APLICACIONES / APPLICATIONS

- *Estadios / Stadiums.*
- *Lugares de culto al aire libre / Outdoor events.*
- *Conciertos al aire libre / Outdoor concerts.*
- *Eventos corporativos / Corporate events.*

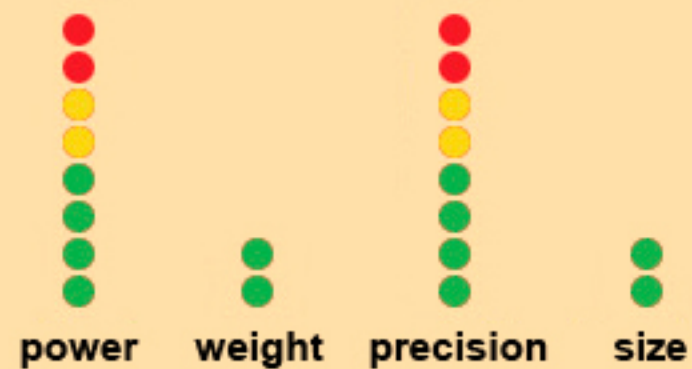

Excelente para P.A. Conciertos en estadios, lugares de culto y eventos corporativos donde precisemos un gran rendimiento y alto SPL. Simplemente el mejor de su rango, gracias a su inmejorable relación potencia-tamaño. El mejor rendimiento, el mejor servicio y asesoramiento técnico al detalle junto con la fácil adquisición de repuestos, garantizan el éxito del profesional en todos sus eventos. GT 118 B es un sistema tremendamente poderoso con una potencia máxima de pico de 137 dB, ideal como refuerzo de graves, capaz de sonorizar recintos mucho más grandes que ningún otro sistema de sonido de su rango.

Excellent for P.A. Concerts in stadiums, outdoor sites and corporate events where we could use high performance and SPL. Simply the best thanks to its power and size relationship. The best performance, the best service and technical assessment to detail with the easy purchase of its spare parts guarantee professional achievement in all of your events. GT 118 B is a extremely powerful sound system with a maximum peak power handling of 137 dB, ideal as a deep reinforce, transmitting the sound to greater enclosures than the other speakers in its rank.

GT 118 B es un sistema subwoofer equipado con un altavoz de 18" en un recinto sintonizado. Ideal como refuerzo de graves para todos los sistemas de la **Serie GT**. La configuración del transductor, al tratarse de un subwoofer, genera una proyección de audio omnidireccional.

GT 118 B is a subwoofer sound system, equipped with one (1) speaker of 18" in a tuned enclosure. Ideal as bass reinforcement for all the **GT Series** systems. Since it is a subwoofer system, the transducer configuration, generates an omnidirectional audio projection.

ESPECIFICACIONES ACUSTICAS / ACOUSTIC SPECIFICATIONS





Power Handling:	1200 W RMS (EIA 426A Standard). Programme of 2400 W / 4800 W peak.
Nominal Impedance:	8 Ohm
Average Sensitivity:	100 dB / 2.83 V/1m (average of 50 - 1000 Hz wideband).
Calculated Maximum SPL:	/ 1m 131 dB continuous / programme of 134 dB / 137 dB peak.
Frequency Range:	± 3 dB from 40 to 100 Hz.
Nominal Directivity:	Omnidirectional.
Low Frequency Driver:	One (1) Beyma speaker of 18", 8 Ohm, 1200 W, 485mm in diameter with high temperature, glass fiber voice coil.
Recommended Amplifier:	Pro DG Systems GT 2.5, GT 4.0, GT 8.0 or Lab Gruppen FP 3400, FP 6000Q.
Connectors:	2 NL4MP speakon connectors.
Acoustic Box:	CNC model, 18 mm made from birch wood plated on the exterior.
Finish:	Standard black paint job.
Box Dimensions:	(HxWxD); 520x715x605mm (20,47"x28,15"x23,82").
Weight:	47,6 Kg (104,94 lbs) net weight / 48,8 Kg (107,59 lbs) gross weight with packaging.

ESPECIFICACIONES ADICIONALES / ADDITIONAL SPECIFICATIONS


Patín y funda de transporte para dos unidades
/ Trolley and covers for two (2) units.



ARQUITECTURAL / ARCHITECTURAL

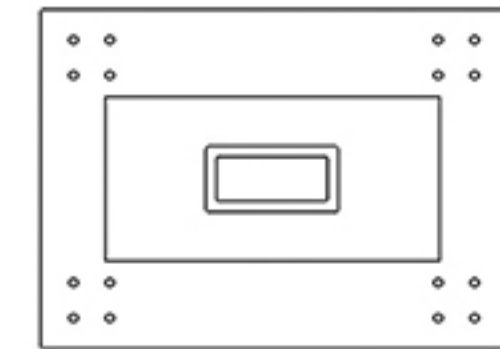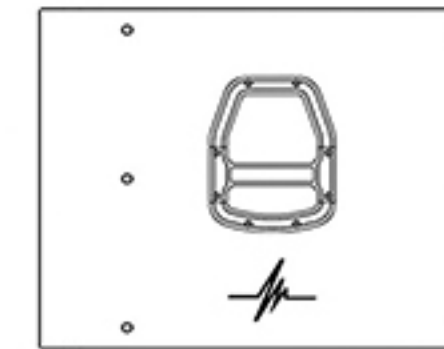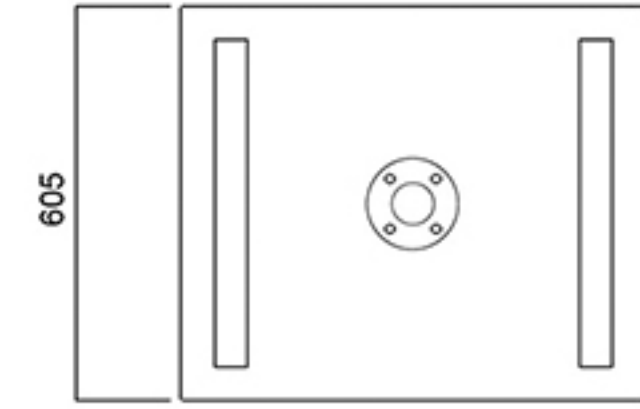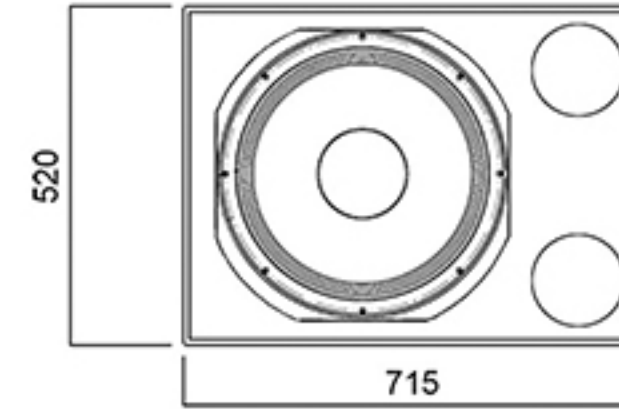

Respuesta de Frecuencia / Frequency Response

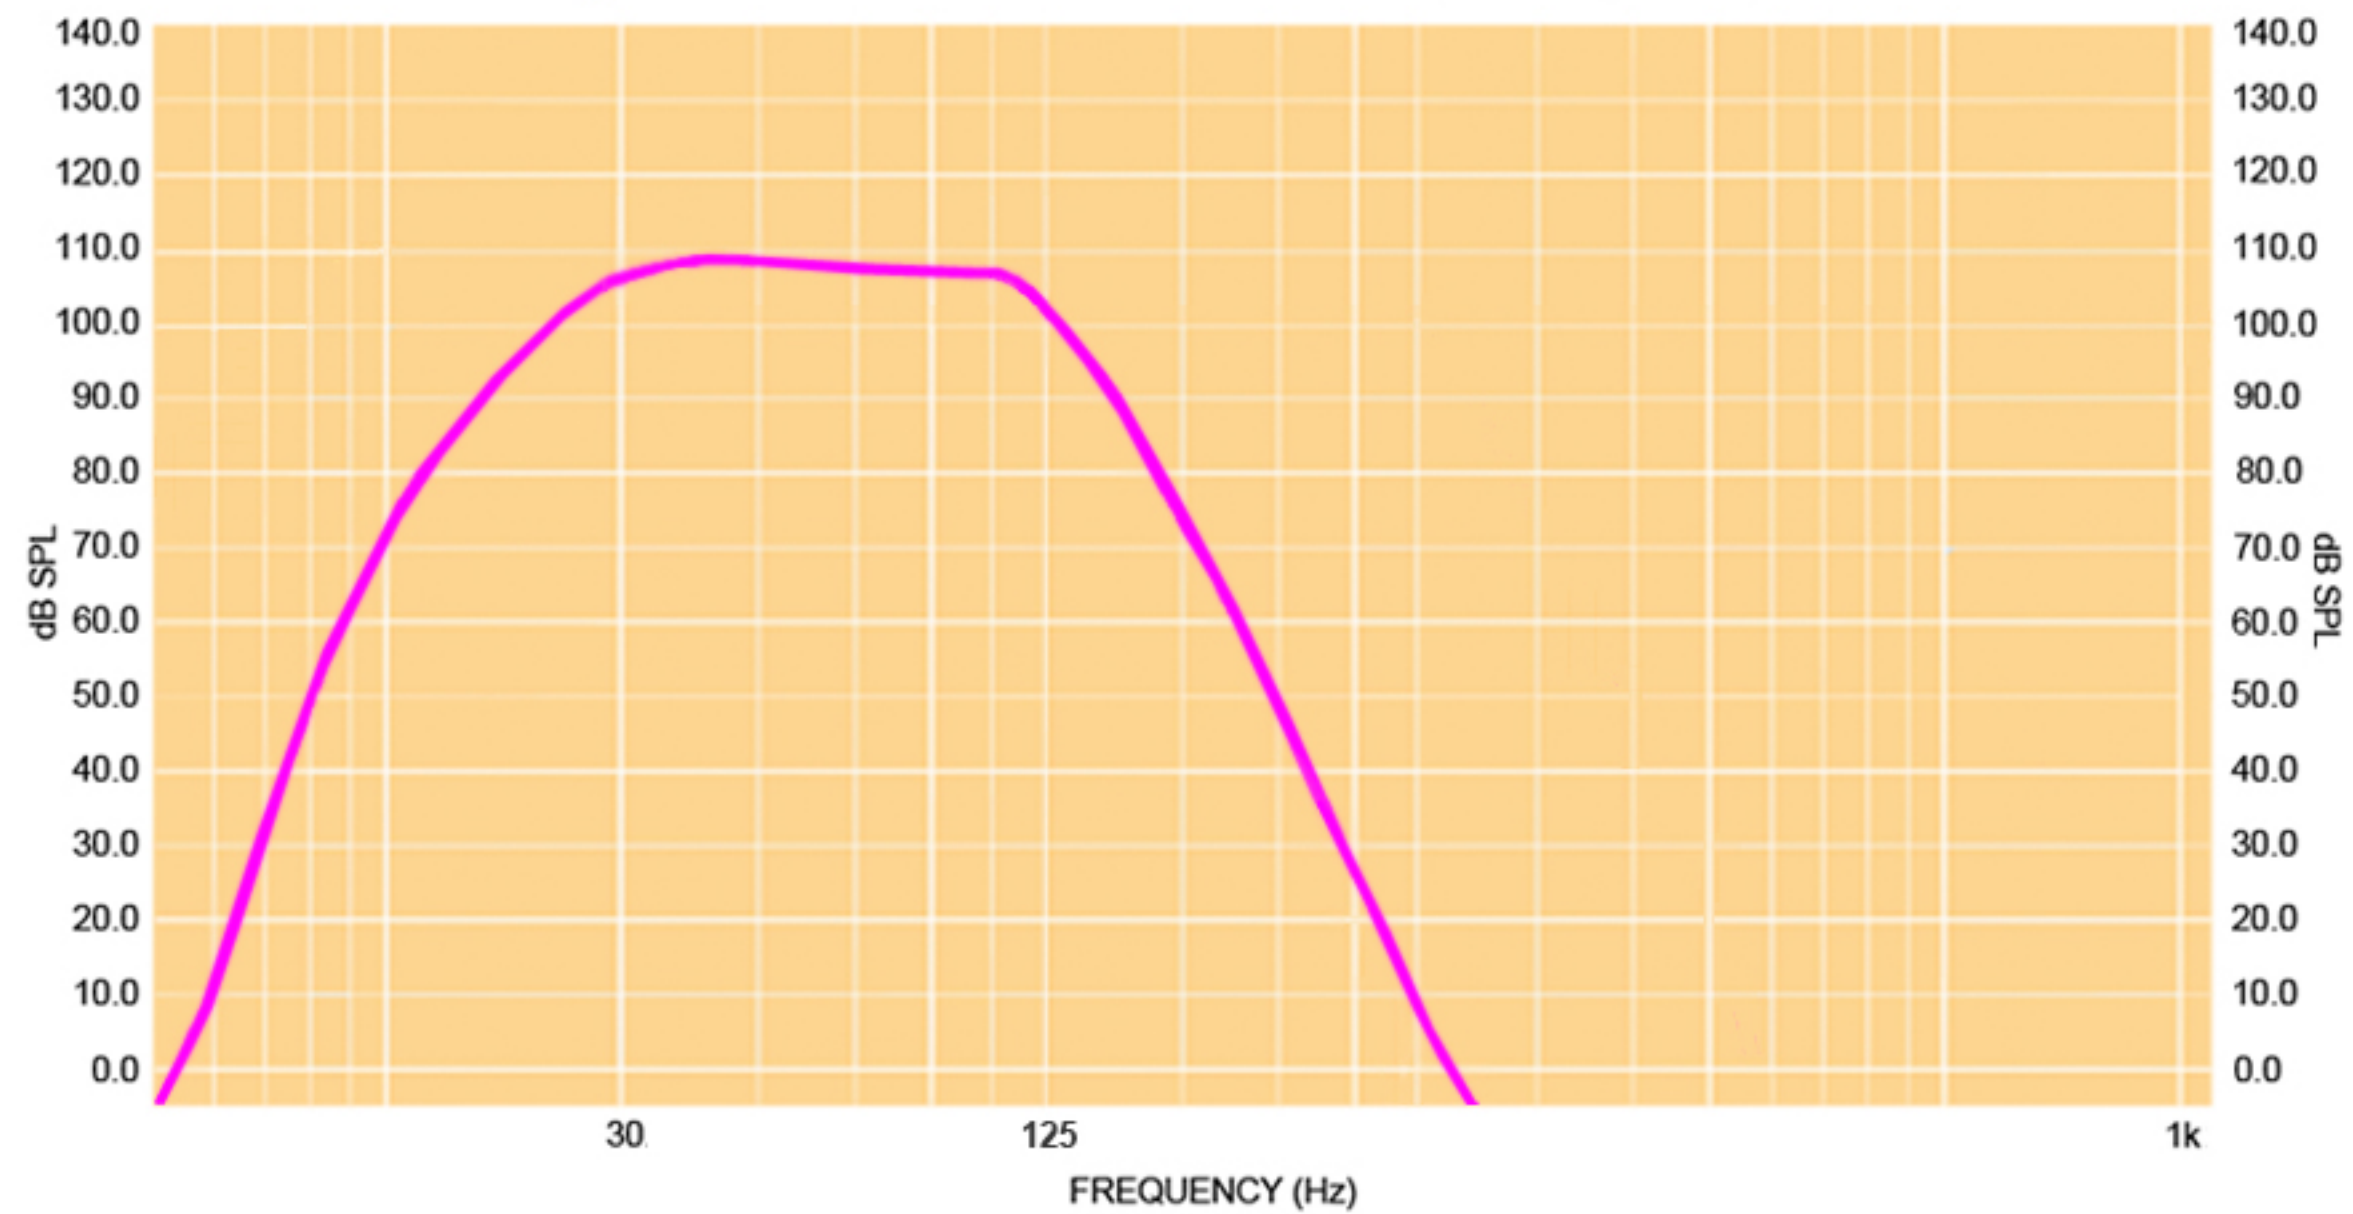



Pro DG Systems.

Urb. Rivera de San Luis. 21

14500. Puente Genil (Córdoba). Spain

Tlf: 678 548 947 607 290 698

www.prodgsystems.com