

IT Series

Pequeños / Medianos eventos Lugares de culto Teatros Discotecas
Small / Medium events Houses of worship Theaters Night clubs



100 %
Made in
Europe



IT 118 F-1200

Compacto subwoofer de alto rendimiento
Compact High Performance subwoofer





IT 118 F-1200

Compacto subwoofer de alto rendimiento / Compact High Performance subwoofer.

Una nueva generación.

La Serie IT es la última generación de la línea de instalación y touring de la familia Pro DG Systems. IT 118 F-1200 es el perfecto sistema para utilizarse como refuerzo de graves en pequeños y medianos eventos. Tanto para touring como para instalación permanente.

IT 118 F-1200 es lo suficientemente compacto y potente para el concierto en directo y discotecas, así como todo tipo de instalación "indoor", siendo además un actor destacado en producciones teatrales y eventos corporativos.

A new generation.


The IT Series is the last generation for installation and touring from Pro DG Systems. IT 118 F-1200 is the perfect system to be used as low or deep in small and medium events. It can be used for touring or for permanent set up. IT 118 F-1200 is compacted and powerful enough for concerts and night clubs, as well as indoor setups. Finally it has been extensively used in theater productions and corporate events.

DETALLES & BENEFICIOS DETAILS & BENEFITS

- *Mediano tamaño, gran rendimiento / Small size, high performance.*
- *Excelente como refuerzo de graves / Excellent as a reinforce for deep tunes.*
- *Fácil integración con todos los sistemas de la Serie IT / Flexible integration with all systems from Pro DG Systems IT Series.*

APLICACIONES / APPLICATIONS

- Pequeños - Medianos eventos / Small - Medium events.
- Lugares de culto / Houses of worship.
- Teatros / Theaters.
- Eventos "indoor" / Indoor events.

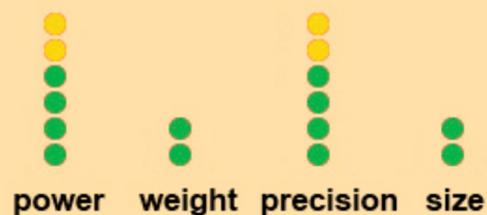

690 mm (27,17")

Peso: 51,6 Kg (113,76 lbs)

580 mm (22,83")

680 mm (26,77")

Excelente para pequeña P.A. Teatros, lugares de culto y eventos "indoor" donde precisemos un óptimo rendimiento y SPL. Simplemente el mejor, gracias a su increíble relación potencia - tamaño. El mejor rendimiento, servicio y asesoramiento técnico al detalle, junto con la fácil adquisición de repuestos garantizan el éxito del profesional. IT 118 F-1200 es un sistema tremendamente poderoso, con una potencia máxima de pico de 137 dB, ideal como refuerzo de graves para los sistemas de la Serie IT.

Excellent for small P.A. Theaters, houses of worship and indoor events where we could use high performance and SPL. The best in its rank thanks to its power and size relationship.

The best performance, service and technical assessment to detail with the easy purchase of its spare parts guarantee professional achievement in all of your events. IT 118 F-1200 is an extremely powerful system with a maximum peak power handling of 137 dB ideal as a deep reinforce for IT Series systems.


IT 118 F-1200 es un sistema subwoofer, equipado con un altavoz de 18" en un recinto sintonizado. Ideal como refuerzo de graves para los sistemas de la Serie IT. La configuración del transductor, al ser un subwoofer, genera una proyección de audio omnidireccional.

IT 118 F-1200 is a subwoofer system equipped with one (1) 18" speaker in a tuned enclosure. Ideal as a deep or low reinforce for all the IT Series systems. Since it is a subwoofer sound system the transducer configuration generates an omnidirectional audio projection.


ESPECIFICACIONES ACUSTICAS / ACOUSTICS SPECIFICATIONS

| | |
|--------------------------------|--|
| Power Handling: | 1200 W RMS (EIA 426A Standard). Programme of 2400 W / 4800 W peak. |
| Nominal Impedance: | 8 Ohm (8.8 Ohm mínimo a 40 Hz) |
| Average Sensitivity: | 100 dB / 2.83 V/1m (average of 50 - 1000 Hz wideband). |
| Calculated Maximum SPL: | / 1m 131 dB continuous / programme of 134 dB / 137 dB peak. |
| Frequency Response: | (-6 dB) 30 Hz - 1000 Hz. |
| Frequency Range: | ± 3 dB from 40 to 1000 Hz. |
| Nominal Directivity: | Omnidirectional. |
| Low Frequency Driver: | 1 Beyma 18" speaker, 8 Ohm, 1200 W, 485mm in diameter with high temperature, glass fiber voice coil. |
| Recommended Amplifier: | Pro DG Systems GT 4.0, GT 8.0 or Lab Gruppen FP 3400, FP 6000Q. |
| Connectors: | 2 NL4MP speakon connectors. |
| Acoustic Box: | CNC model, 18 mm made from birch wood plated on the exterior. |
| Finish: | Standard black paint job. |
| Box Dimensions: | (HxWxD); 690x580x680mm (27,17"x22,83"x26,77"). |
| Weight: | 51,6 Kg (113,76 lbs) net weight / 52,8 Kg (116,40 lbs) gross with packaging. |

ARQUITECTURAL / ARCHITECTURAL

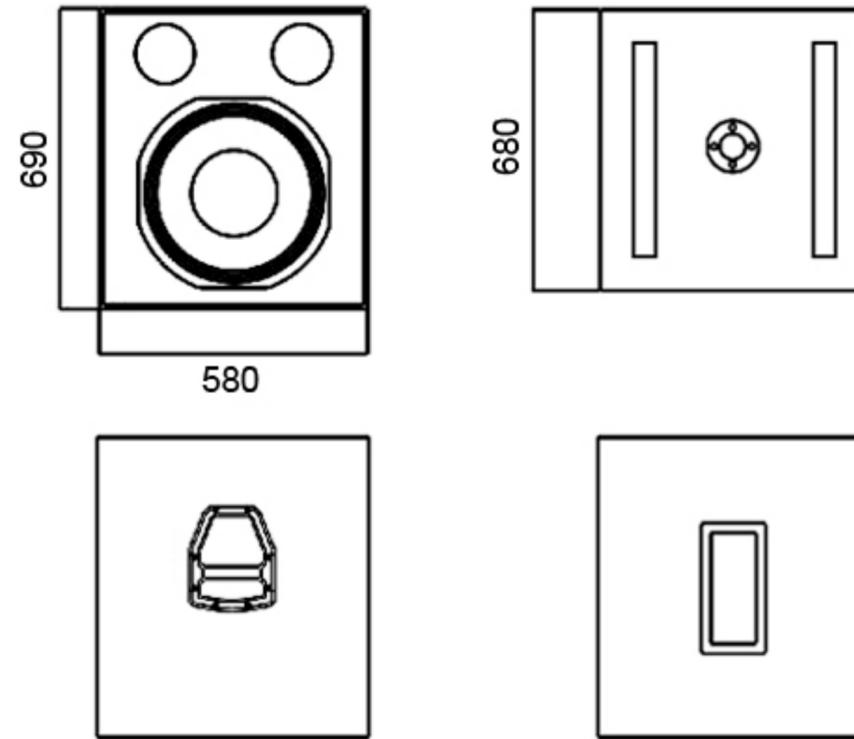

Respuesta de Frecuencia / Frequency Response

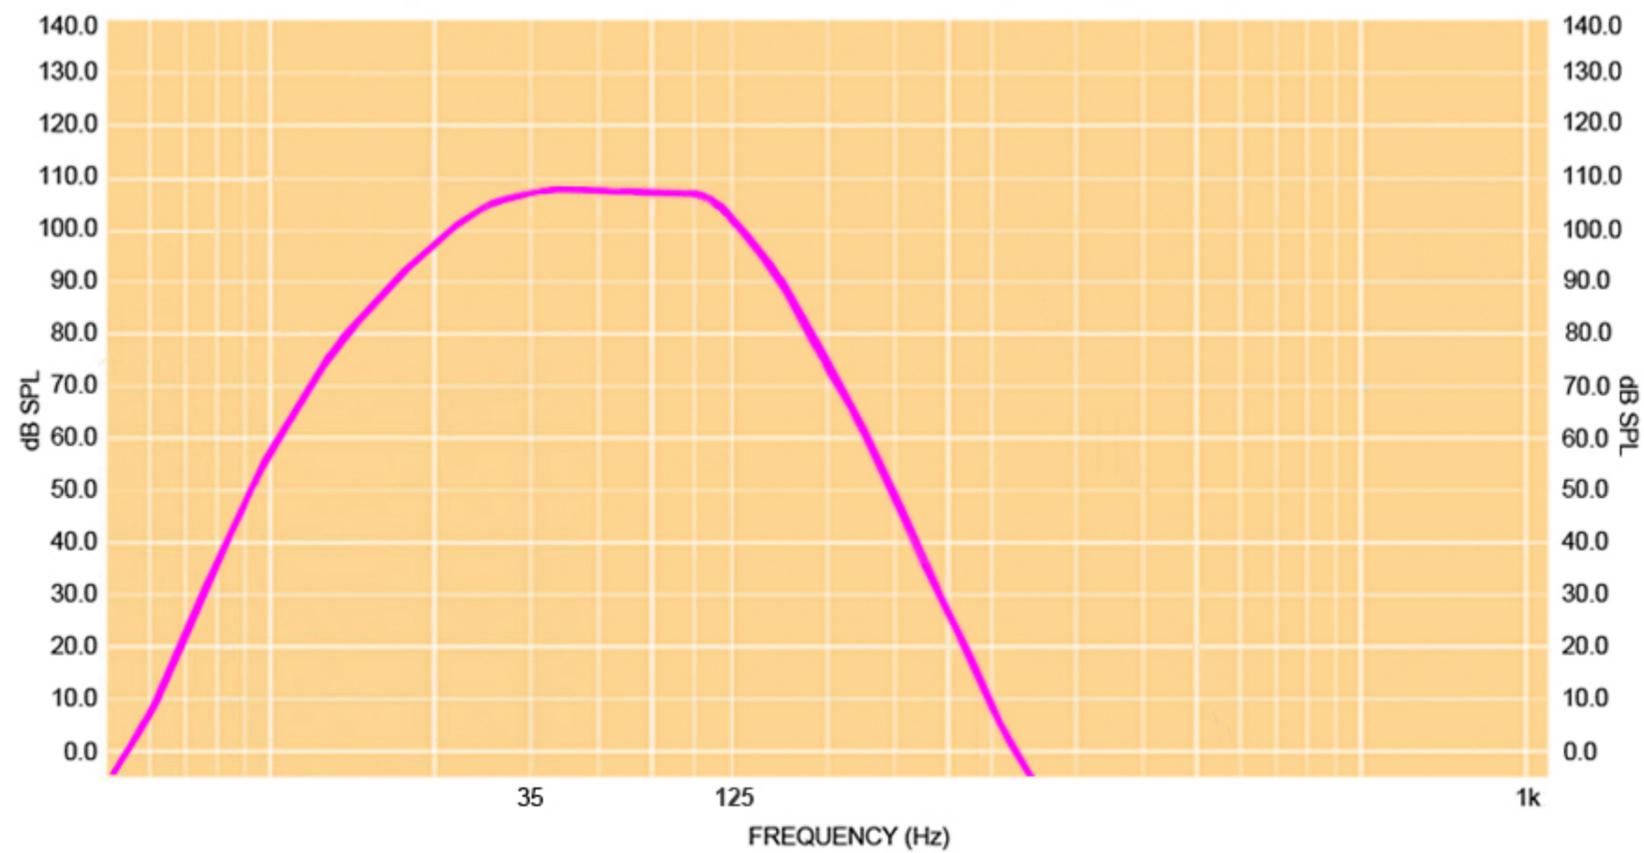



Pro DG Systems.

Urb. Rivera de San Luis. 21

14500. Puente Genil (Córdoba). Spain

Tlf: 678 548 947 607 290 698

www.prodgsystems.com