



**Compact design.  
16.9 Kg weight**





**10" speaker with  
2,5" voice coil**

**96kHz, 24-bit DSP  
processor with  
preset modes:  
Monitor, DJ, Live**



**Class-D amplifier  
400 W RMS.  
Impedance 4 Ohms**

**Can be placed  
vertically or  
horizontally.  
Top & side handle**

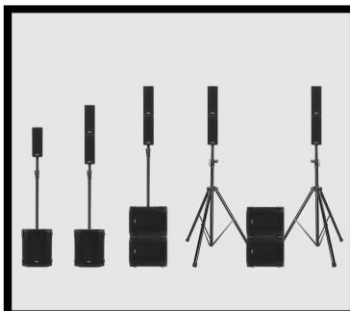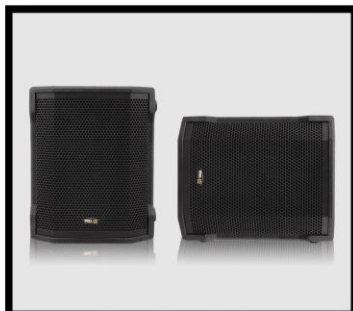

**Extreme versatility for  
quick configurations**

### Subwoofer amplifier module

400W RMS Class-D amplifier with switch-mode power supply

### Digital Signal Processing

96kHz, 24-bit DSP processor with preset modes: Monitor, DJ, Live

### Line Input & Thru Out

2 XLR / Jack input channels with mic and line switch + XLR Link



### Bluetooth connectivity

Bluetooth and True Wireless Stereo connection available

### Satellite & Subwoofer Output

Speakon output for Mid/High Speaker and XLR for slave Sub

### Separate Volume Controls

Independent volume controls for mid/high speaker and subwoofer

Technical Specifications		i 110 BA
Power Handling	400 W RMS (EIA 426A Standard) / 800 W program / 1600 W peak	
Nominal Impedance	4 Ohm	
Average Sensitivity	96dB / 2.83V / 1m (average of 150 - 1000Hz wideband)	
Maximum SPL Calculation	/ 1m 113 dB continuous / 116 dB program / 119 dB peak	
Frequency Range	+/-3 dB between 47 - 200 kHz	
Nominal Directivity	Omnidirectional	
Component	One (1) speaker of 10" 400W, 2.5"voice coil	
Amplifier	Last generation Class-D amplifier with switch-mode power supply. 96kHz, 24 bit DSP processor with three preset modes: Monitor, DJ, Live	
Connectors	2 XLR / Jack input channels with mic and line switch + XLR Link	
Controls	Power On / Off switch, satellite level, subwoofer level, Line / Mic switch, Bluetooth On / Off switch, TWS switch, DSP modes switch	
Power Supply	110~220V 50/60HZ with voltage selector	
Acoustic Enclosure	15mm MDF	
Finish	Special paint finish in black	
Grille	1.5mm thickness metal grille with 0.5mm acoustic foam	
Cabinet Dimensions	(HxWxD); 390x300x495mm (15.35"x11.81"x19.49")	
Weight	16.9 Kg (37.26 lbs) net / 17.5 Kg (38.58 lbs) with packaging	